


A-H(St)HSO Bd Si mtp* Fca

in resemblance to DIN VDE 0815

* capable of maxi-termi-point

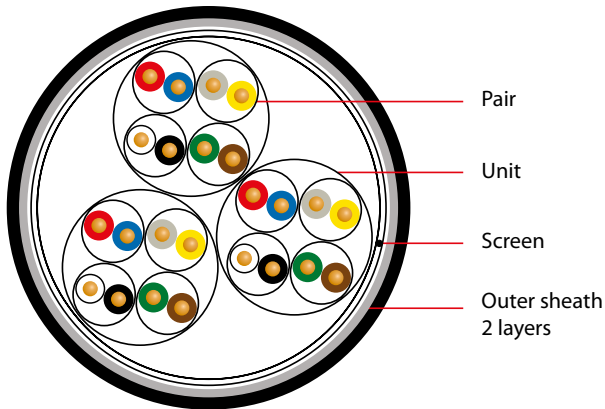

APPLICATION

This halogen-free, flame-resistant cable is used where increased fire protection of persons, material goods and buildings is required. It serves for signal transmission in communication systems with fixed installation, especially for use outdoors in drains, pipes and sand. Not approved for power installation. Appropriate for water installation.

CONSTRUCTION

Conductor: copper solid, bare (Ø 0.8 mm)

Core insulation: halogen free compound

Core stranding: 2 cores to pair, 4 pairs to unit, units in layers; 2 x 2 as star quad

Lapping: min. 2 layers plastic foil

Shield: tinned drain wire (Ø 0.8 mm); plastic-laminated aluminium foil

Outer sheath:

Inner layer: halogen free compound;

Outer layer: halogen free special compound; colour: black RAL 9005

BEHAVIOUR UNDER FIRE CONDITIONS

Zero halogen, non corrosive gases: IEC 60754-2, DIN EN 50267

Flame retardant: IEC 60332-1-2, DIN EN 60332-1-2

Fire retardant: IEC 60332-3-24, DIN EN 60332-3-24

Smoke density: IEC 61034, DIN EN 61034

Dimension	Sheath thickness approx. mm	Diameter approx. mm	Cable weight approx. kg/km	Copper index kg/km
2 x 2 x 0.8	1.0	8.0	85	25
4 x 2 x 0.8	1.0	9.6	130	45
8 x 2 x 0.8	1.0	12.4	205	85
12 x 2 x 0.8	1.0	13.0	255	126
16 x 2 x 0.8	1.0	14.0	310	166
20 x 2 x 0.8	1.2	15.8	385	206

ELECTRICAL CHARACTERISTICS

(Conductor) loop resistance max.	73.2 Ω/km
Insulation resistance min.	100 MΩ x km
Mutual capacitance (800 Hz) max.	120 nF/km 2 and 4 pair cable plus 20% permitted 1 pair 180nF/km
Capacitance unbalance (800 Hz) max.	200 pF/100m 20% of values, min. one value max. 400 pF
Test voltage core-core	500 V 50 Hz 1 min
Test voltage core-screen	2000 V 50 Hz 1 min
Peak operating voltage	225 V

THERMAL & MECHANICAL PROPERTIES

Temperature range moved	-5°C to +50°C
Temperature range static	-30°C to +70°C
Minimum bending radius	7.5 x diameter

Subject to changes due to technical progress and error



T.K. Kabel oHG · Geschwister-Scholl-Straße 11 · 71384 Weinstadt

Phone +49 (0) 7151/60 68 70 · Fax +49 (0) 7151/60 91 00 · info@tk-kabel.de · www.tk-kabel.de