


# A-Y(St)YCY-FR Bd Si Fca

in resemblance to DIN VDE 0815

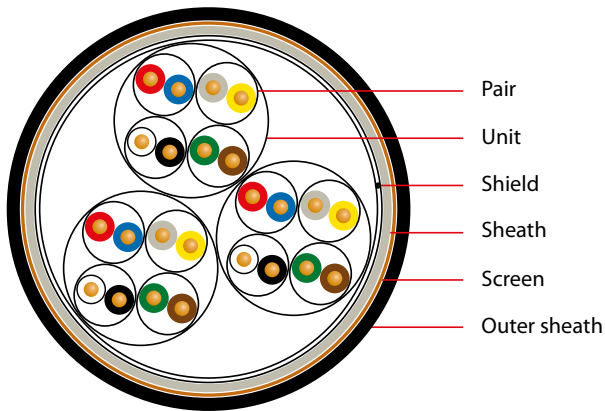

Dimension	Sheath thickness approx. mm	Diameter approx. mm	Cable weight approx. kg/km	Copper index kg/km
(Cu3.5) 1 x 2 x 0.8	1.8	10.7	160	58
(Cu3.5) 2 x 2 x 0.8	1.8	11.5	185	72
2 x 2 x 0.8	1.8	10.5	165	65
4 x 2 x 0.8	1.8	12.3	220	95
8 x 2 x 0.8	1.8	14.3	310	147
12 x 2 x 0.8	1.8	15.7	390	190
16 x 2 x 0.8	1.8	18.0	475	232
20 x 2 x 0.8	1.8	18.5	540	298
32 x 2 x 0.8	2.0	23.2	745	448
40 x 2 x 0.8	2.0	26.6	930	525

## APPLICATION

For information transmission in dry and moist production sites, in and under plaster, as well as outdoors for fixed installation. Not approved for power installation, but appropriate for underground installation.

## CONSTRUCTION

**Conductor:** copper, solid, bare (Ø 0.8 mm)

**Core insulation:** PVC

**Core stranding:** 2 cores to pair, 4 pairs to unit, units in layers; 2 x 2 as star quad

**Lapping:** plastic foil

**Shield:** tinned drain wire (Ø 0.8 mm); plastic-laminated aluminium foil

**Sheath:** PVC

**Screen:** tinned copper wire braid (Ø 0.2 mm); optical coverage approx. 80 %

**Outer sheath:** PVC-FR;

colour: black RAL 9005 or blue RAL 5015 uv-resistant

## BEHAVIOUR UNDER FIRE CONDITIONS

Fire retardant: IEC 60332-3-24, DIN EN 60332-3-24

Low smoke and fume

## ELECTRICAL CHARACTERISTICS

(Conductor) loop resistance max.	73.2 Ω/km
Insulation resistance min.	100 MΩ x km
Mutual capacitance (800 Hz) max.	100 nF/km 2 and 4 pair cable plus 20% permitted 1 pair 180nF/km
Capacitance unbalance (800 Hz) max.	200 pF/100m 20% of values, min. one value max. 400 pF
Test voltage core-core	500 V 50 Hz 1 min
Test voltage core-screen	2000 V 50 Hz 1 min
Peak operating voltage	225 V

## THERMAL & MECHANICAL PROPERTIES

Temperature range during installation	-5°C to +50°C
Temperature range stationary	-30°C to +70°C
Minimum bending radius	10 x diameter

Subject to changes due to technical progress and error



T.K. Kabel oHG · Geschwister-Scholl-Straße 11 · 71384 Weinstadt

Phone +49 (0) 7151/60 68 70 · Fax +49 (0) 7151/60 91 00 · info@tk-kabel.de · www.tk-kabel.de