


LI7YC7YS7Y n x 2 x 0.5 GY/BU

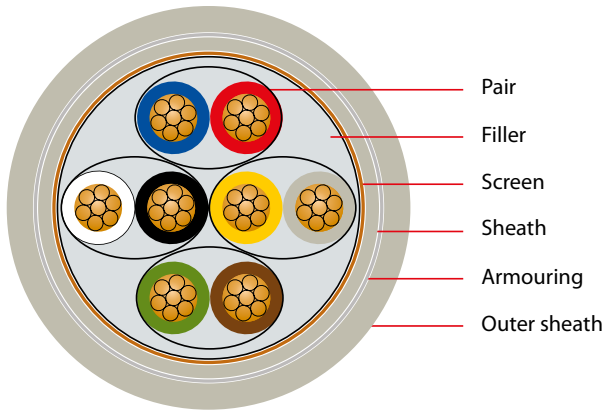

No. of cores and cross section	Sheath thickness approx. mm	Diameter approx. mm	Cable weight approx. kg/km	Copper index kg/km
2 x 2 x 0.5	0.4	7.88	117	30
4 x 2 x 0.5	0.4	9.3	170	55

APPLICATION

- in heat-appliances and fire resistant installations
- in the lighting and automobile sector
- for sensor applications
- plants in industrial atmosphere
- in the chemical industry

CONSTRUCTION

- Conductor:** tinned copper strand; 16 x 0.2 mm = 0.5 mm²
- Core insulation:** ETFE; wall thickness 0.25 mm; approx. Ø 1.45 mm
- Core identification:** colours acc. VDE 0815 or customer request
- Core stranding:** 2 cores to pair
- Filler:** silicone rubber (round shaping)
- Screen:** tinned copper wire braid; optical coverage approx. 85 %
- Sheath:** ETFE
- Armouring:** galvanized steel wire braid (Ø 0.2 mm)
- Outer sheath:** ETFE; colour: grey (GY) or blue (BU)

ELECTRICAL CHARACTERISTICS

Test voltage	2500 V
Operating capacitance	80 nF/km
Inductance (reference values)	< 1 mH/km

THERMAL & MECHANICAL PROPERTIES

Operating temperature	-90°C to +155°C
-----------------------	-----------------

Subject to changes due to technical progress and error

