


LISOSI51Y 1 x 1.5

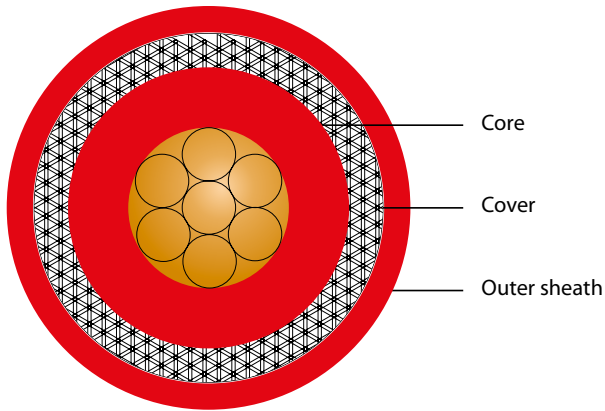

No. of cores and cross section	Sheath thickness approx. mm	Diameter approx. mm	Cable weight approx. kg/km	Copper index kg/km
1 x 1.5	0.5	7.0	69	14.4

APPLICATION

Ignition lead

CONSTRUCTION

Conductor: tinned copper strand; 48 x 0.2 mm = 1.5 mm²

Core insulation: notch-tight silicone rubber (2G) FRNC; approx. Ø 5.40 mm

Cover: glass fibre braid

Outer sheath: PFA (51Y); colour: red

ELECTRICAL CHARACTERISTICS

Ignition voltage at 50Hz

8 kV eff

Test voltage at 50Hz

15 kV eff

THERMAL & MECHANICAL PROPERTIES

Operating temperature

-50°C to +180°C

Subject to changes due to technical progress and error

