


XLAN 1200 S/FTP 4PR AWG 22/1

Category 7a · 1200 MHz

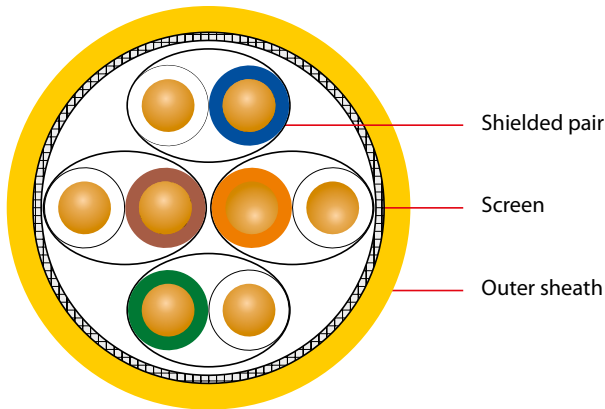

APPLICATION

Data cable for analogue and digital signal transmission in the frequency range up to 1200 MHz. It is designed for primary (campus), secondary (riser) and tertiary (horizontal) wiring.

Use: IEEE 802.3; 10/100/1000/10GBase-T; FDDI, broadband, video, ISDN, ATM, Multimedia, PoE

NORMEN

EN 50288-4-1; IEC 61156-5; EN 50173-1; ISO/IEC 11801 2nd edition; IEC 60332-1; IEC 60332-3-22; IEC 60754-2; EN 61034; IEC 61034 RoHS 2002/95/EC

CONSTRUCTION

Conductor: copper, solid, bare, AWG 22/1

Core insulation: SFS-PE

Core identification: wh-bu, wh-or, wh-gn, wh-bn

Core stranding: cores twisted to layers

Shielded pairs: each pair one layer plastic laminated aluminium foil; drain wire optional

Screen: tinned copper wire braid

Sheath: PVC or halogen-free compound (FRNC); colour: yellow RAL 1021

ELECTRICAL CHARACTERISTICS

(Conductor) loop resistance max.	13.0 Ω/100 m
Insulation resistance min.	5 GΩ x km
Char. impedance 1 – 100 MHz	100 ±15 Ω
Char. impedance 100 – 250 MHz	100 ±22 Ω
Char. impedance 250 – 1000 MHz	100 ±25 Ω
Transfer impedance max. (10 MHz)	5 mΩ / m
Mutual capacitance nom.	45 nF/km
Relative propagation velocity approx.	0.79 c
Screen attenuation ≤ 1000 MHz min.	85 dB
Test voltage	700 V-AC

Dimension	Sheath thickness approx. mm	Diameter approx. mm	Cable weight approx. kg/km	Copper index kg/km	Calorific potential MJ/km
4 x 2 x AWG22	0.60	7.9	73	42	705

Transmission characteristics

The stated performance data are characteristic measurements.

f MHz	Attenuation nom. dB/100m	NEXT nom. dB	ACR nom. dB/100m	EL-FEXT nom. dB/100m	RL nom. dB
1	1.7	105	103	105	25
4	3.2	105	102	103	28
10	5.1	105	100	100	30
16	6.4	105	99	98	30
20	7.1	105	98	95	30
31.25	9	105	96	93	30
62.5	13.1	105	92	90	30
100	16.5	102	85	85	30
155	21.6	100	78	82	29
200	23.5	98	74	78	28
300	29.1	96	67	70	27
500	37	91	54	63	26
600	41.5	88	46	60	25
1000	55.9	78	32	52	21
1200	60.8	76	15	42	19

THERMAL & MECHANICAL PROPERTIES

Temperature range during installation	0° C to +50 °C
Temperature range stationary	-20 °C to +60 °C
Min. bending radius under tensile load	8 x diameter
Min. bending radius without tensile load	4 x diameter
Maximum traction	130 N

Subject to changes due to technical progress and error



T.K. Kabel oHG · Geschwister-Scholl-Straße 11 · 71384 Weinstadt

Phone +49 (0) 7151/60 68 70 · Fax +49 (0) 7151/60 91 00 · info@tk-kabel.de · www.tk-kabel.de